


AM-AS

UGELLI SOTTOVALVOLA PER ADDOLCITORI FILTER NOZZLES FOR SOFTENERS




- Ampia superficie filtrante e basse perdite di carico
- Attacco a baionetta o filettato
- High filtering area and low pressure loss
- Bayonet or threaded fitting

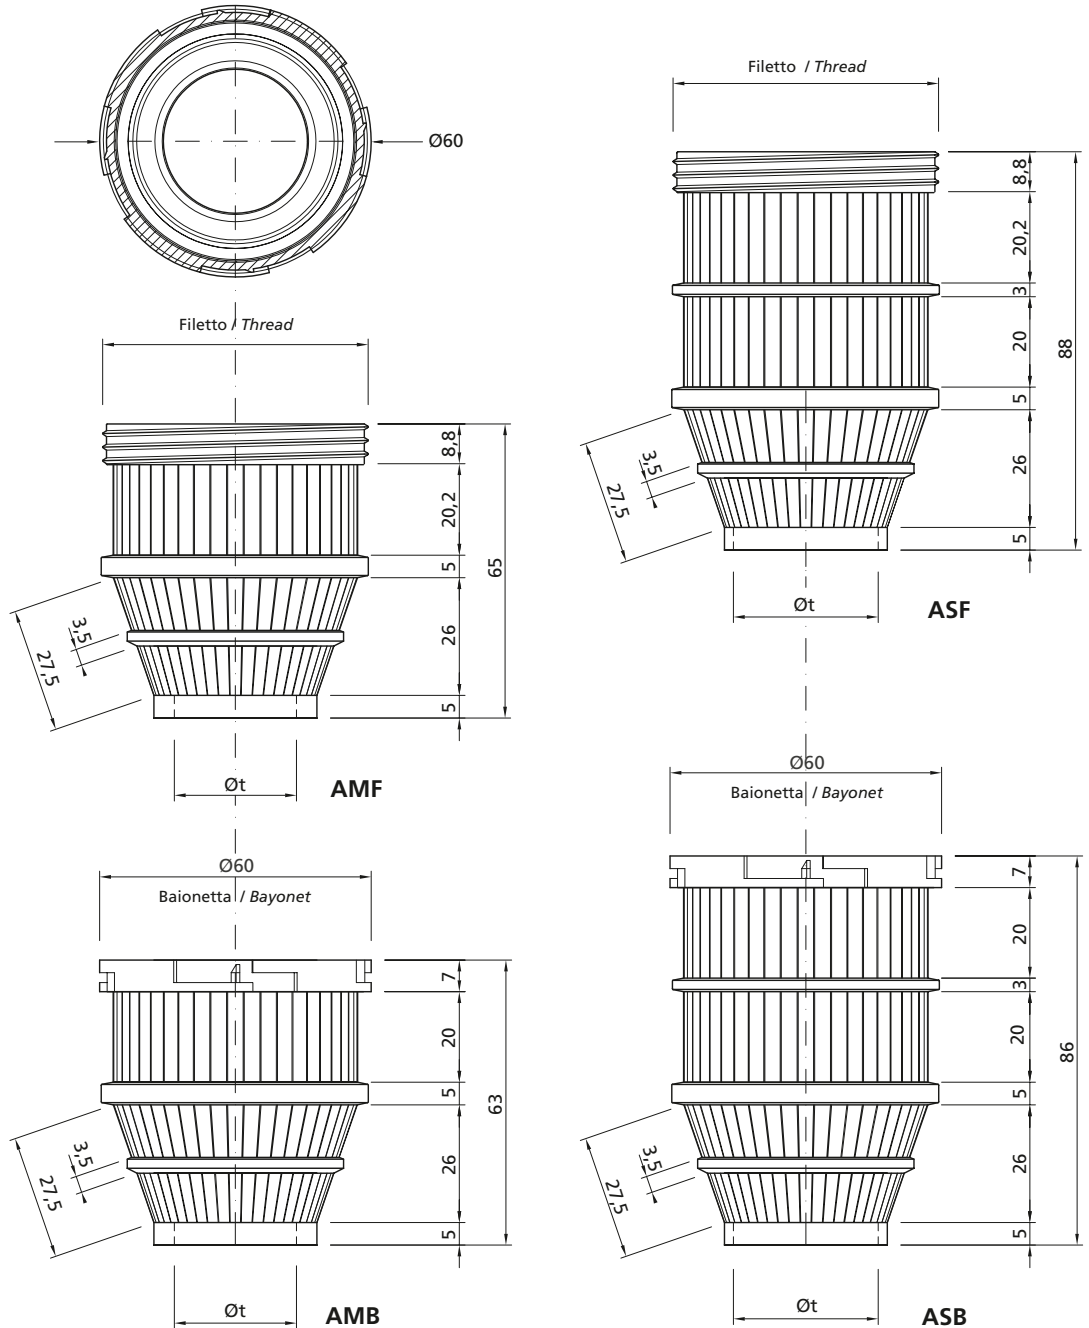

Tipo Type		Øt Diametro tubazione Pipe diameter mm	Connessione Connection	Fessure Slot width mm	Sezione Area mm ²
AMB	AMB21	21-13/16"	Baionetta Bayonet	0,20	396
	AMB27	27-1,05"		0,20	396
AMF	AMF21	21-13/16"	Filetto Thread	0,20	396
	AMF27	27-1,05"		0,20	396
ASB	ASB21	21-13/16"	Baionetta Bayonet	0,25	720
	ASB27	27-1,05"		0,25	720
	ASB32	32		0,25	720
ASF	ASF21	21-13/16"	Filetto Thread	0,25	720
	ASF27	27-1,05"		0,25	720
	ASF32	32		0,25	720

Come ordinare How to order	Ugello Nozzle	Fessura Slot width	Materiale Material
Esempio / Example	ASB32	0,25	ABS

Materiale / Material:	ABS
-----------------------	-----

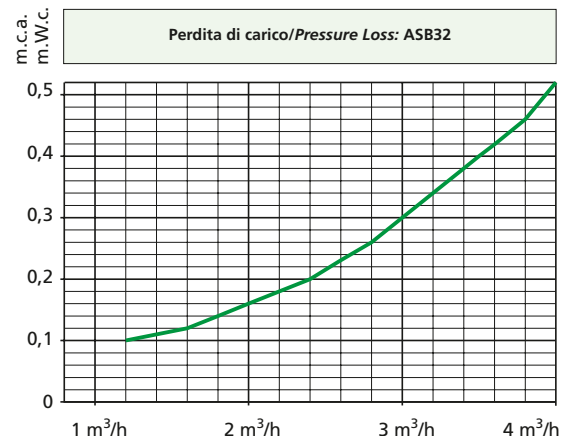

Note: Su richiesta, può essere fornita la curva caratteristica di dP di tutti gli ugelli prodotti da ILMAP.

On demand, the dP characteristic curve of all the nozzles made by Imap can be supplied.